


SensoLite 110 G Set





Laser receiver for green rotary lasers

Rev.1215

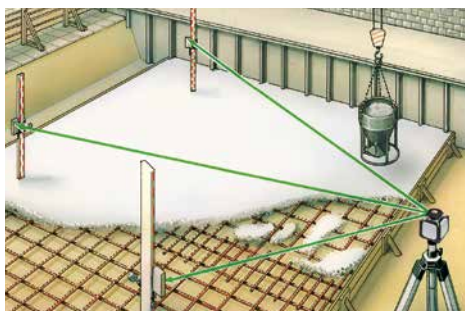

- **Fast alignment work** in close and long range
- The **LC display on the front** and the acoustic signals show the height of the laser beam.
- **The universal mount** enables the device to be attached to levelling staffs.
- **Loud piezo-buzzer** possible
- **Head magnet**

Not suitable for red lasers.

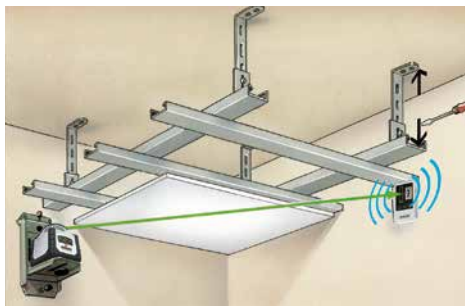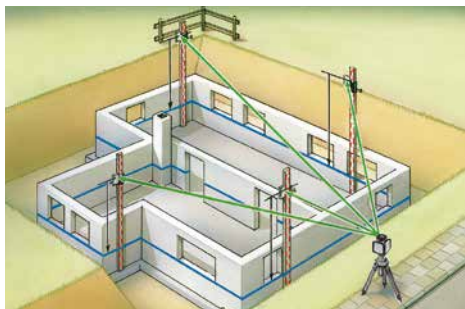

TECHNICAL DATA

LASER RECEPTION RANGE	1 - 100 m (depends on the rotary laser)
LENGTH OF RECEIVER UNIT	52 mm
NECESSARY ROTATION SPEED	300 – 1100 r/min
WATER AND DUST PROTECTION	IP 54
POWER SUPPLY	2 x 1.5 V alkaline batteries (type AAA)
DIMENSIONS (W x H x D)	without universal mount 60 x 110 x 23 mm
WEIGHT with batteries / without universal mount:	138 g



Max. reception range
100 m

Including
universal mount

Head magnet



SensoLite 110 G Set
including universal mount
+ batteries

ARTICLE	ARTICLE-NO	EAN-CODE	PU
SensoLite 110 G Set	028.66	4 021563 695652	1

