


Laserliner

LaserRange-Master T2



Laser distance finder – Simple operating techniques

Rev.0617

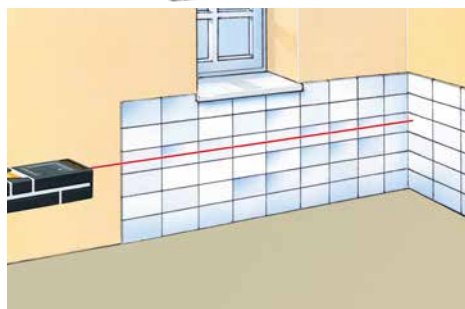

- Point-precise measuring with laser to determine lengths exactly
- Measuring accuracy up to 20 m: ± 2 mm*
- Inside measurement range: 0.2 m to 20 m
- 3 selectable measurement reference points: front, tripod and rear
- Continuous measuring function
- Illuminated 3-line colour LCD
- Stable, ergonomic housing



Illuminated colour LCD

Simple operating techniques

TECHNICAL DATA	
ACCURACY	± 2 mm (typical)*
MEASUREMENT RANGE	max. 20 m
MINIMAL RANGE	0,2 m
LASER	Class 2 < 1mW
LASER WAVELENGTH	650 nm
OPERATING TEMPERATURE	0°C ... 40°C
STORAGE TEMPERATURE	-20°C ... 70°C
UNIT (selectable)	m / ft / inch / ' _ ' "
FUNCTIONS distances, continuous measurement	
POWER SUPPLY Batteries 2 x 1.5 V type AAA	
DIMENSIONS (W x H x D) 100 x 23 x 35 mm	
WEIGHT with batteries 82 g	

* See operating instructions for specific accuracies



LaserRange-Master T2

inclusive softbag
+ batteries (2 x 1.5 V type AAA)

Packaging dimension (W x H x D)
113 x 236 x 64 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master T2	080.820A	4 021563 701933	5

