

Laserliner®



SmartCross-Laser set



Rev.0317



Automatic cross-line laser with universal clamping bracket

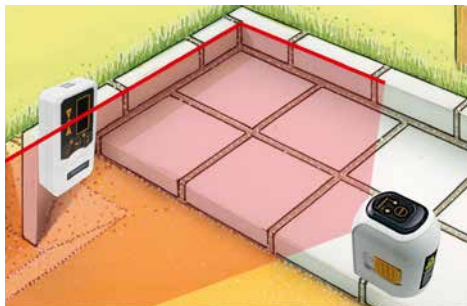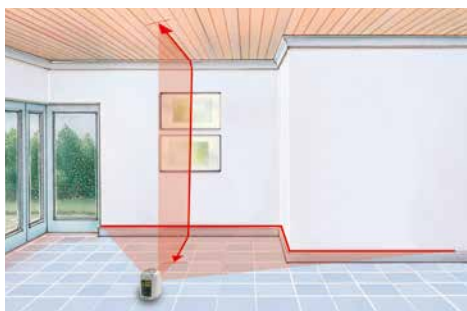

SmartCross-Laser


- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines
- **Additional slope mode** to align angled surfaces.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 30 m radius – ideal for all interior and exterior applications.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport Lock:** a pendulum lock protects unit during transport.
- **Simple, uniform operating techniques**

FlexClamp


- **Height and position of the measuring device** easily adjustable using with crossline lasers for interior finishing work
- **Versatile damage free mounting options** for surfaces
- Suitable for all laser measuring devices with 1/4" threads

TECHNICAL DATA


SELF-LEVELLING RANGE ± 5°
ACCURACY ± 0.5 mm / m
LEVELLING automatic
OPERATING RANGE (depending on room illumination) 10 m
LASER WAVELENGTH 650 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME 15 hours (alkaline batteries)
WORKING TEMPERATURE 0°C ... +40°C
STORAGE TEMPERATURE -10°C ... +70°C
DIMENSIONS (W x H x D) 55 x 85 x 75 mm
WEIGHT (complete set) 675 g



Automatic Level



Pendulum can be locked for protection during transport



Adjustable and free mounting options



SmartCross-Laser set

inclusive SmartCross-Laser
+ FlexClamp
+ batteries

Packing dimension (W x H x D)
175 x 295 x 85 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartCross-Laser set	081.116A	4 021563 694389	4

